


INVISIDOOR 2.0 MODULAR AND INVISIBLE FRAME FOR INTERIOR DOORS



argenta OPENING DOORS



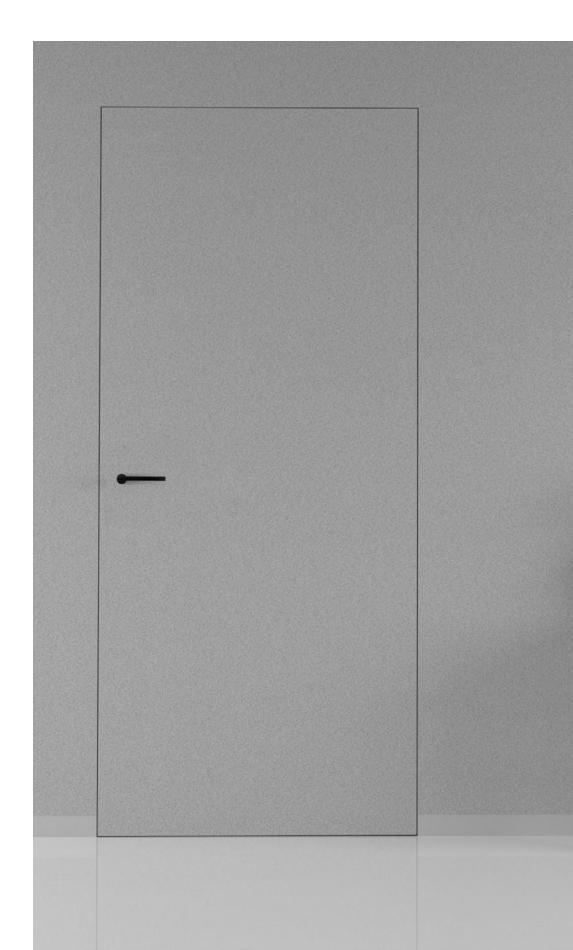

ARLU, THE REFERENCE FOR OPENING DOORS


ARLU® is the manufacturer behind the brand names argenta® and rob®. Argenta has been a leading brand in door hardware for over 100 years, but today it is mainly synonymous with invisible door systems.

Minimalist architecture swears by clean lines and a "back to the essence" mentality. In terms of interior doors, this results in integrated door fittings, invisible integrated techniques, door frames and skirting boards for revolving, sliding and pivoting doors.

Argenta stands for a full range of sleek interior solutions.

INVISIDOOR 2.0

Maximum flexibility in invisible doorframes: that's what invisidoor® 2.0 stands for. The doorframe of invisidoor 2.0 consists of a base profile with u-profiling, in which the position of the invisible neo hinges and the lock can be freely selected using various adapters. The base frame for doors rotating to both the left and the right is the same, meaning the rotation direction of the door can still be freely decided even after the frame has been plastered in. Once the position of the adapters has been decided, the remaining space in the u-profile is simply and neatly finished using the cover profile.

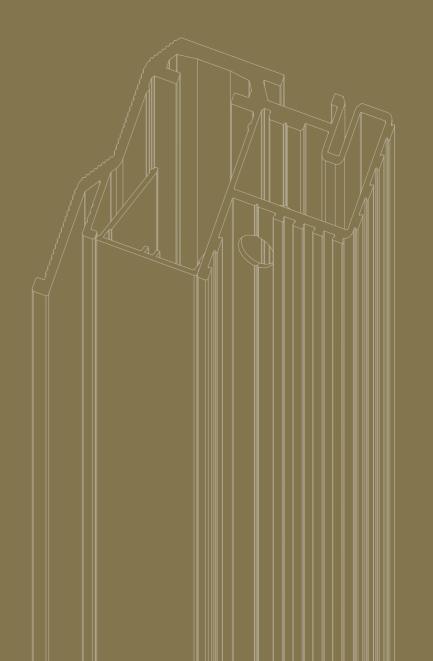

INVIVIDUOR A.O

3

argenta invisidoor 2.0

What are the benefits?

Modular

- A single frame for both left and right-hand doors
- Free choice between a left or right-hand door, even after the doorframe has been installed/finished
- Adding an extra hinge or door closer is always possible

Aesthetics

- · No visible frame around the door
- Paintable primer coating as standard (powder-coated in any RAL colour upon request)

Efficient installation

- Free installation choice in a milled reveal: before or after plastering (excl. reveals)
- The position of the finger plate and hinges can be adjusted depending on the positioning in the door leaf

Can be applied universally


- For all standard and non-standard door openings (newbuild and renovation)
- For standard flush doors
- For both brick and plasterboard walls

Little chance of cracks in plasterwork thanks to:

- Internal corner joints with permanent access to mitres
- Stable profile
- Strong and easy wall-mounting using screws or window anchors
- Special dovetail profiling for excellent PUR and plaster adhesion

Dimensions

- No difference between custom solutions and standard dimensions
- Top rail (width) and stiles (height) can easily be cut/adjusted to size

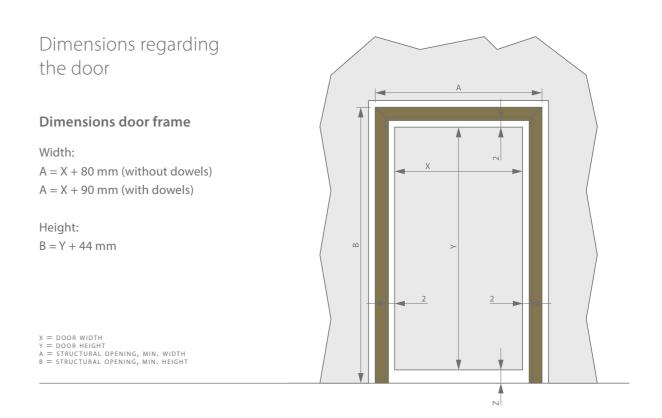

Technical features

	40 mm	44 mm	50 mm	54 mm 1250 mm 2500 mm			
Max. door width - single door	1250 mm	1250 mm	1250 mm				
Max. door width - double door	2500 mm	2500 mm	2500 mm				
Max. door height	4000 mm	4000 mm	4000 mm	4000 mm			
door thickness	38 - 40 mm	44 / 45 mm	50 mm	54 mm			
Min. wall thickness	75 mm	90 mm	90 mm	90 mm			
Fire resistant version (according to EN			EI ₁ 30, EI ₂ 30,				
1634-1)		EW30, E30					

Compile your invisidoor® 2.0 from a wide range of door hardware, all with the associated adapters for installation in the base profile.

argenta® invisidoor 2.0			40		44		50		54	
			in	out	in	out	in	out	in	ou
Hinges										
	neo S-5 (in)	epoxy primer	Ø							
Adapter	neo S-5 (out)	epoxy primer		•	Ø	•				
-+	neo M-6 (in / out)	epoxy primer			Ø	•	Ø	•	Ø	•
	neo S-5	11 finish	•	•	Ø	•				
Hinges	neo M-6	11 finish			Ø	•	•	•	②	•
Locks and	lock plates	Туре					Со	lour		
					Matt	:hrome	ne Black		White	
AGB magnetic lock		Key			Ø		②		Ø	
		Cylinder		Ø		Ø		•		
		Toilettes		Ø		•		②		
Lock plate ———		Adjustable lock plate	Adjustable lock plate pro E		•		•		•	
		Electric striking plate Eff-Eff 118TQ13								
KFV magnetic lock Cyline		Key					(9	(9
		Cylinder		Ø		•		Ø		
		Toilettes			(9	(9
Lock plate		Adjustable lock plate	e KFV		Ø		Ø		0	
KFV magnetic lock Latch lock				Ø		0		•		
+		Adjustable lock plate	e pro E		6		(9	(2
Lock plate		Electric striking plate	e Eff-Eff 118TC	Q13						
argenta magnetic catch magnotica pro E							>		2	

