

FURNITURE HARDWARE









ARLU, THE REFERENCE FOR OPENING DOORS

ARLU® is the manufacturer behind the brand names argenta® and rob®. Argenta has been a leading brand in door hardware for over 100 years, but today it is mainly synonymous with invisible door systems.

Minimalist architecture swears by clean lines and a "back to the essence" mentality. In terms of interior doors, this results in integrated door fittings, invisible integrated techniques, door frames and skirting boards for revolving, sliding and pivoting doors.

Argenta stands for a full range of sleek interior solutions.

01
FURNITURE
HARDWARE FOR
WOODEN PANELS

4 550/560.000

10 sprint

8 format


22 501.000

26 symfo 60

02FURNITURE
HARDWARE FOR

sliding glass

GLASS PANELS

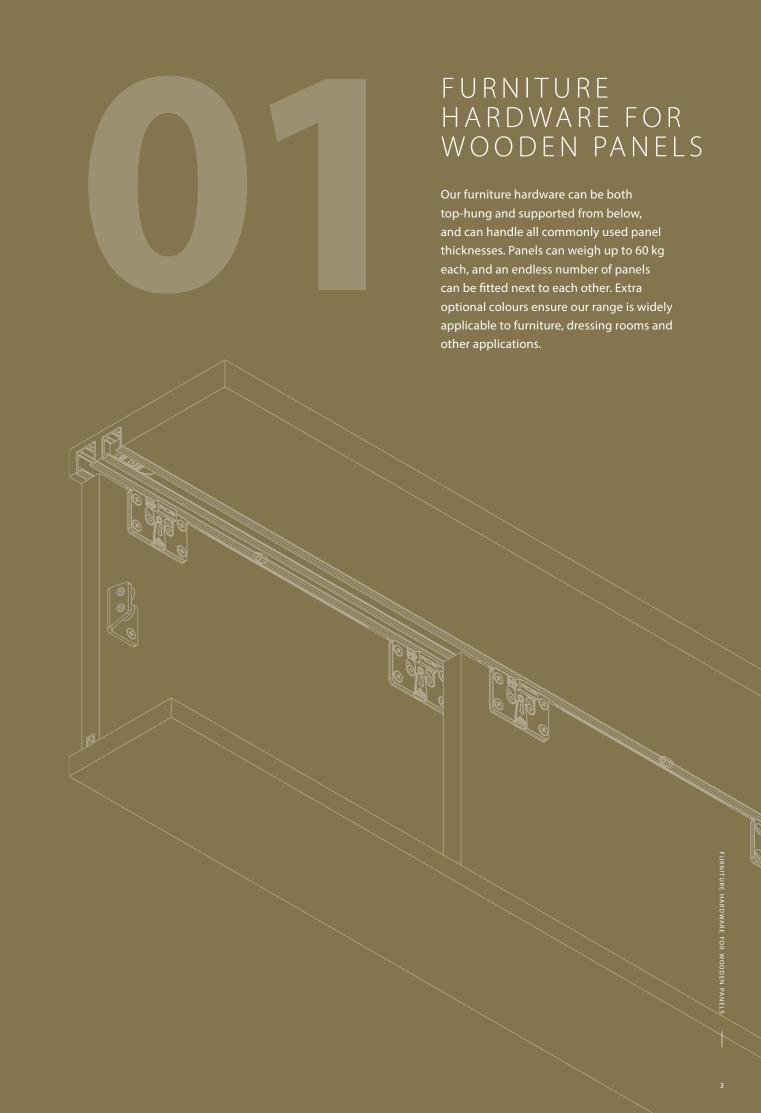




argenta **550/560.000**

The tracks used are made of either aluminium or galvanised sheet steel. A variety of single or double tracks are used to slide the doors together. The rollers in this series, are single – up to max. 20 kg per leaf – or double rollers up to max. 30 kg per leaf. They are mounted on the top edge of the doors using support plates. The rollers on ball bearings are made of plastic and are especially smooth. An alternative form of rollers for lateral mounting for panels from 18 to 48 mm is also available.



Fit using a support plate

Technical drawings

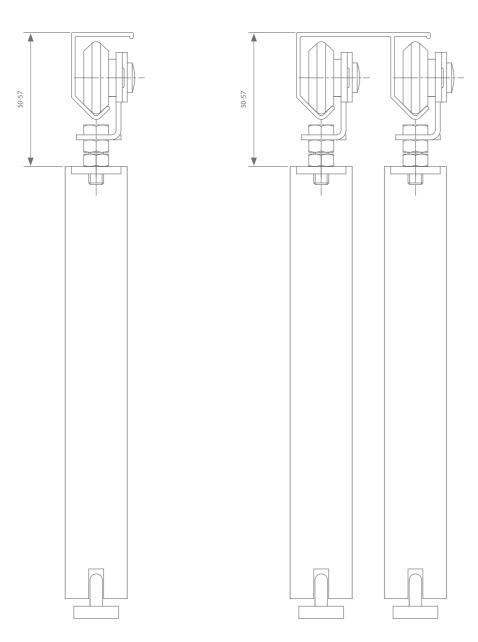







Tracks

| | Max. door width | Length | Reference |
|------------------------|-----------------|---------|-------------|
| | 1050 mm | 2100 mm | 550.008.210 |
| Single aluminium track | 1500 mm | 3000 mm | 550.008.300 |
| | 3000 mm | 6000 mm | 550.008.600 |
| | 750 mm | 1500 mm | 550.000.150 |
| Single steel track | 1000 mm | 2000 mm | 550.000.200 |
| | 1500 mm | 3000 mm | 550.000.300 |
| | | 2100 mm | 560.008.210 |
| Double aluminium track | As per setup | 3000 mm | 560.008.300 |
| | | 6000 mm | 560.008.600 |

Accessories selection

| Max. 20 kg per panel | Reference |
|---------------------------------|-----------|
| Fitting set with single rollers | 550.100 |
| Max. 30 kg per panel | Reference |
| Fitting set with double rollers | 550.600 |


Every fitting set comes with all the rollers, suspension, guiding systems and stopper you need. One fitting set is required per door panel.

sideways attachment

Tracks


| | Max. door width | Length | Reference |
|------------------------|-----------------|---------|-------------|
| | 1050 mm | 2100 mm | 550.008.210 |
| Single aluminium track | 1500 mm | 3000 mm | 550.008.300 |
| | 3000 mm | 6000 mm | 550.008.600 |
| | 750 mm | 1500 mm | 550.000.150 |
| Single steel track | 1000 mm | 2000 mm | 550.000.200 |
| | 1500 mm | 3000 mm | 550.000.300 |

Accessories selection




| Max. 20 kg per panel |
|---------------------------------|
| Fitting set with single rollers |
| 550.200 |
| Max. 30 kg per panel |
| Fitting set with double rollers |
| |

550.700



| Max. 20 kg per panel | | |
|---------------------------------|--|--|
| Fitting set with single rollers | | |
| 560.300 | | |
| Max. 30 kg per panel | | |
| Fitting set with double rollers | | |
| 560.800 | | |



| Max. 20 kg per panel |
|---------------------------------|
| Fitting set with single rollers |
| 560.400 |
| Max. 30 kg per panel |
| Fitting set with double rollers |
| 560.900 |


Every fitting set comes with all the rollers, suspension and guiding systems you need. One fitting set is required per door panel.



Tracks


| | Max. door width | Length | Reference |
|------------------------|-----------------|-------------------------------|---|
| Double aluminium track | As per setup | 2100 mm 3000 mm 6000 mm | 560.008.210 560.008.300 560.008.600 |

Accessories selection




Max. 20 kg per panel

| Fitting set with single rollers | | |
|---------------------------------|---------|--|
| 550.200 | 560.300 | |
| Max. 30 kg per panel | | |
| Fitting set with double rollers | | |
| 550.700 | 560.800 | |




| | Fitting set with single rollers | |
|--|---|---------|
| | 560.400 | 550.200 |
| | Max. 30 kg per panel Fitting set with double rollers | |
| | | |
| | 560.900 | 550.700 |
| | | |


Max. 20 kg per panel




| Max. 20 kg per panel | |
|---------------------------------|---------|
| Fitting set with single rollers | |
| 550.200 | 550.200 |
| Max. 30 kg per panel | |
| Fitting set with double rollers | |
| 550.700 | 550.700 |
| | |



| | Max. 20 kg per p | anel |
|---------------------------------|--------------------|----------------|
| | Fitting set with s | ingle rollers |
| | 550.200 | 560.400 |
| Max. 30 kg per panel | | |
| Fitting set with double rollers | | louble rollers |
| | 550.700 | 560.900 |
| | | |



| Max. 20 kg per panel | | |
|---------------------------------|---------|--|
| Fitting set with single rollers | | |
| 560.300 | 550.200 | |
| Max. 30 kg per panel | | |
| Fitting set with double rollers | | |
| 560.800 | 550.700 | |
| | | |



| Max. 20 kg per panel | | | | |
|---------------------------------|--|--|--|--|
| Fitting set with single rollers | | | | |
| 560.300 560.400 | | | | |
| Max. 30 kg per panel | | | | |
| Fitting set with double rollers | | | | |
| 560.800 560.900 | | | | |
| | | | | |

Every fitting set comes with all the rollers, suspension and guiding systems you need. One fitting set is required per door panel.



argenta **SPRINT**


With this system, cabinet doors weighing up to 35 kg per panel can be finished in a minimalist way using a built-in top track. A bottom guide system behind the door for up to two panels sitting in front of each another or a smaller bottom guide system complete this invisible fitting. Silent operation combined with an invisible soft close guarantee an extremely comfortable experience.



recessed suspension and bottom guide at the back

assemble your set

Technical drawings

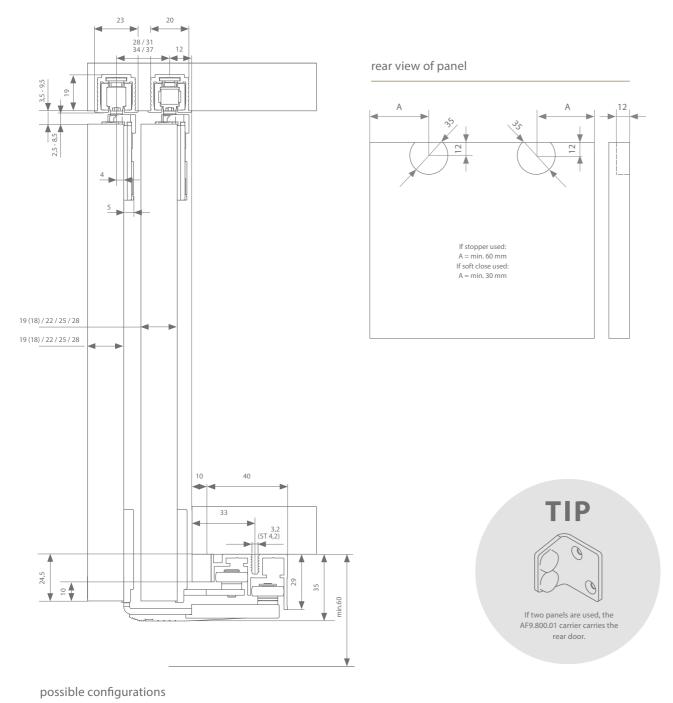

Tracks

| | Max. door width | Length | Reference |
|--------------------|-----------------|---------|-------------|
| | | 2000 mm | AF0.308.200 |
| D | | 3000 mm | AF0.308.300 |
| Running track | As per setup | 4000 mm | AF0.308.400 |
| | | 6000 mm | AF0.308.600 |
| Bottom guide track | | 2000 mm | AF0.618.200 |
| | | 3000 mm | AF0.618.300 |
| | As per setup | 4000 mm | AF0.618.400 |
| | | 6000 mm | AF0.618.600 |

Accessories selection

| | Reference |
|---------------------|--------------|
| Front panel | AF0.120 |
| Rear panel | AF0.110 |
| Softclose expansion | AF2.385.020* |


Every fitting set comes with all the rollers, suspension, guiding systems and stoppers you need. One fitting set is required per door panel.

* With 1 softclose — min. door width = 345 mm, with 2 softcloses — min. door width = 525 mm

recessed suspension and bottom guide at the edge

assemble your set

Technical drawings

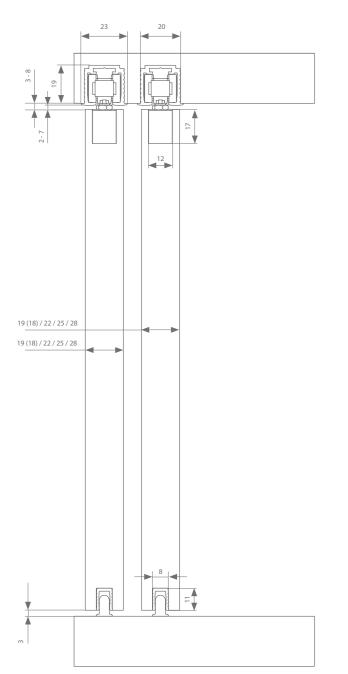





Tracks

| | Max. door width | Length | Reference |
|--------------------|-----------------|---------|-------------|
| | | 2000 mm | AF0.308.200 |
| D : | | 3000 mm | AF0.308.300 |
| Running track | As per setup | 4000 mm | AF0.308.400 |
| | | 6000 mm | AF0.308.600 |
| Bottom guide track | 1000 mm | 1000 mm | AF0.608.100 |
| | 1250 mm | 1250 mm | AF0.608.125 |
| | 1500 mm | 1500 mm | AF0.608.150 |
| | 2000 mm | 2000 mm | AF0.608.200 |
| | 3000 mm | 3000 mm | AF0.608.300 |
| | 4000 mm | 4000 mm | AF0.608.400 |
| | | | |

Accessories selection


| | Reference |
|---------------------|--------------|
| Fittings | AF0.800 |
| Softclose expansion | AF2.385.020* |

Every fitting set comes with all the rollers, suspension, guiding systems and stoppers you need. One fitting set is required per door panel. * With 1 softclose — min. door width = 385 mm, with 2 softcloses — min. door width = 592 mm

recessed suspension at the back and bottom guide at the edge

assemble your set

Technical drawings

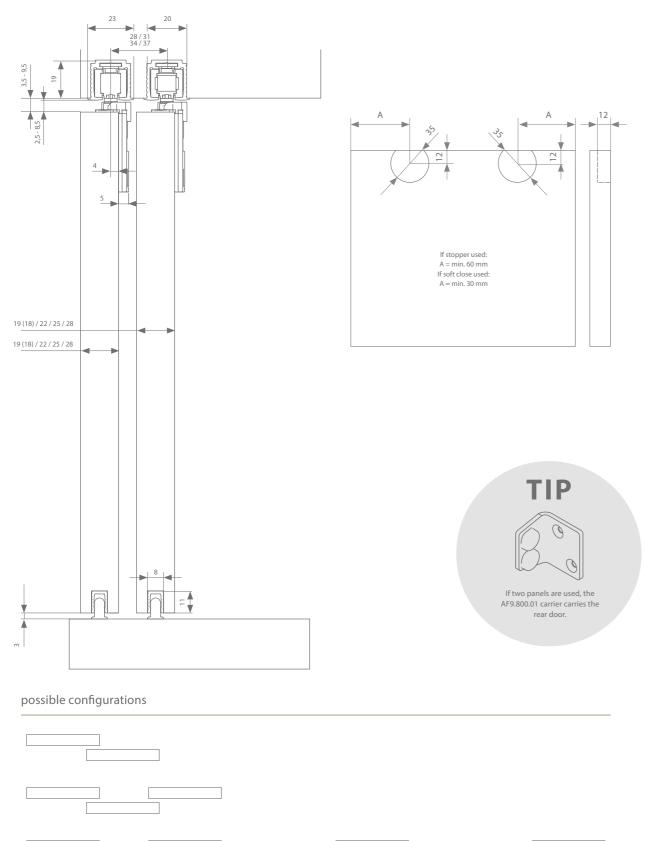


Tracks

| | Max. door width | Length | Reference | |
|--------------------|-----------------|---------|-------------|--|
| | | 2000 mm | AF0.308.200 | |
| | | 3000 mm | AF0.308.300 | |
| Running track | As per setup | 4000 mm | AF0.308.400 | |
| | | 6000 mm | AF0.308.600 | |
| Bottom guide track | 1000 mm | 1000 mm | AF0.608.100 | |
| | 1250 mm | 1250 mm | AF0.608.125 | |
| | 1500 mm | 1500 mm | AF0.608.150 | |
| | 2000 mm | 2000 mm | AF0.608.200 | |
| | 3000 mm | 3000 mm | AF0.608.300 | |
| | 4000 mm | 4000 mm | AF0.608.400 | |

Accessories selection

| | Reference |
|---------------------|--------------|
| Fittings | AF0.100 |
| Softclose expansion | AF2.385.020* |

Every fitting set comes with all the rollers, suspension, guiding systems and stoppers you need. One fitting set is required per door panel. * With 1 softclose — min. door width = 345 mm, with 2 softcloses — min. door width = 525 mm

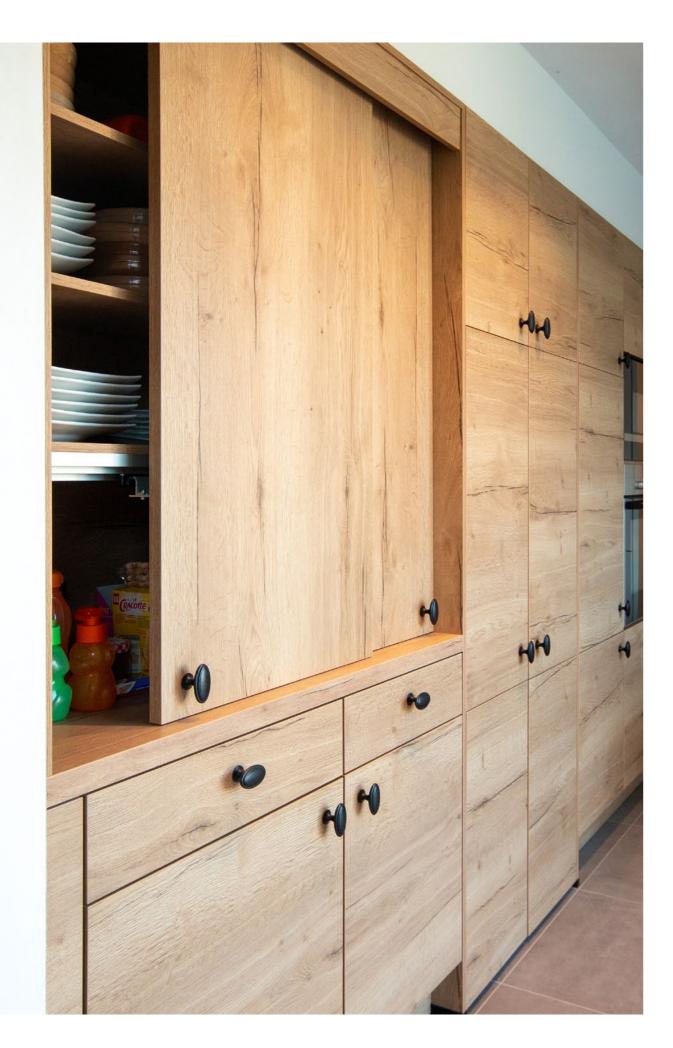



argenta **FORMAT**

This series includes all accessories for the comfortable operation of forward-facing cabinet doors with a maximum weight of 50 kg per door. A height adjustment of 11 mm is possible, and the system can be used for panel thicknesses between 18 and 32 mm. Using a patented click system at the bottom, the cabinet doors can be single-handedly installed. The Format cabinet door hardware is our high-quality range, with attention being paid to design and sustainability. The hardware is hidden, making it seem like the doors are 'floating'.



argenta format



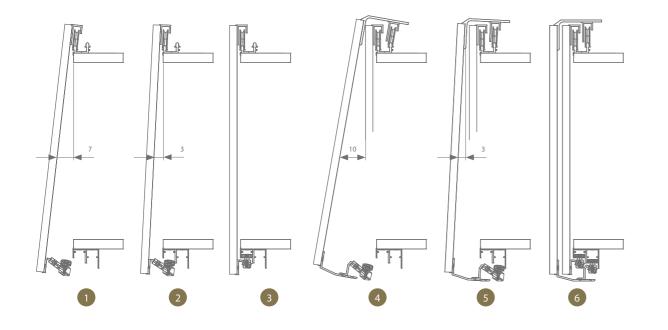

possible configurations possible configurations

Tracks

| | Max. door width | Length | Reference |
|--------------------|-----------------|---------|-------------|
| | | 2000 mm | 570.208.200 |
| D | | 3000 mm | 570.208.300 |
| Running track | As per setup | 4000 mm | 570.208.400 |
| | | 6000 mm | 570.208.600 |
| | 2000 mm | 2000 mm | 570.608.200 |
| Bottom guide track | 3000 mm | 3000 mm | 570.608.300 |
| | 4000 mm | 4000 mm | 570.608.400 |
| | 6000 mm | 6000 mm | 570.608.600 |

Accessories selection

| | Reference |
|-------------|-----------|
| Front panel | 574.600 |
| Rear panel | 574.100 |

 $Every \ fitting \ set \ comes \ with \ all \ the \ rollers, \ suspension, \ guiding \ systems \ and \ stoppers \ you \ need. \ One \ fitting \ set \ is \ required \ per \ door \ panel.$



argenta **501.000**

The easy-to-assemble cupboard door fitting of the 501.000 series provides smooth and quiet operation for panels with a maximum weight of 25 kg.







argenta 501.000



X = MIN. 16 MM A = X + 6A = MIN. 22 MM B = X - 10

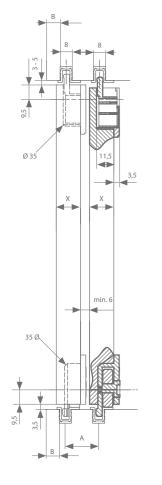

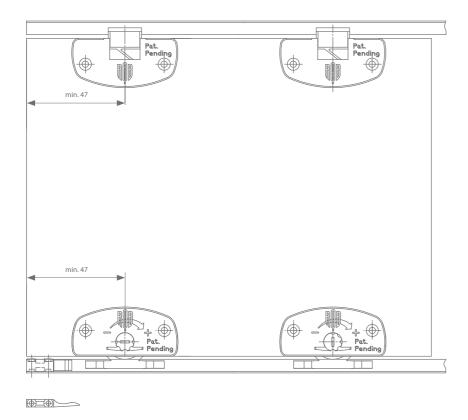

Tracks

| | Max. door width | Length | Reference |
|---------------------|-----------------|--------------------|----------------------------|
| Running track white | As per setup | 3000 mm 5000 mm | 501.001.300 501.001.500 |
| Running track brown | As per setup | 3000 mm 5000 mm | 501.003.300 501.003.500 |

Accessories selection

| | Reference |
|------------|-----------|
| Gear white | 501.101 |
| Gear brown | 501.103 |

All fitting sets come with the necessary rollers, guiding systems and stoppers . One fitting set is required per door panel.

possible configurations





argenta **SYMFO 60**

Symfo 60 combines a top guiding system with bottom sliders to support doors up to a maximum weight of 60 kg . These fittings are suitable for panels between 16 and 19 mm thick. The rollers are attached at the back of the panel.










Technical drawings




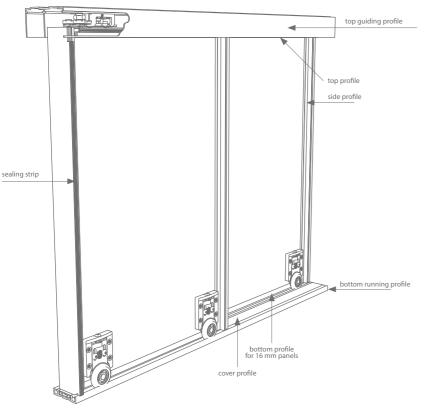

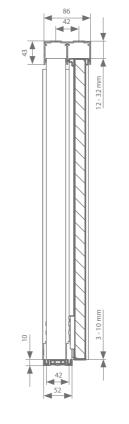

with upper roller guide



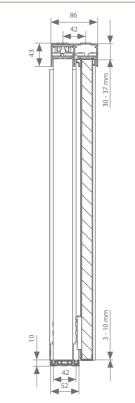

possible configurations



Tracks & profiles

| | Max. door width | Length | Grey anodised | White | Black |
|------------------------------------|-----------------|--------------------|---------------|---------------|---------------|
| | | 2000 mm | DK0.118.200.0 | DK0.118.200.1 | DK0.118.200.2 |
| Top guiding track | As per setup | 3000 mm | DK0.118.300.0 | DK0.118.300.1 | DK0.118.300.2 |
| | | 6000 mm | DK0.118.600.0 | DK0.118.600.1 | DK0.118.600.2 |
| | 2000 mm | 2000 mm | DK0.418.200.0 | DK0.418.200.1 | DK0.418.200.2 |
| Top guiding profile | 3000 mm | 3000 mm | DK0.418.300.0 | DK0.418.300.1 | DK0.418.300.2 |
| | 6000 mm | 6000 mm | DK0.418.600.0 | DK0.418.600.1 | DK0.418.600.2 |
| Door handle profile | | 2600 mm | DK0.408.260.0 | DK0.408.260.1 | DK0.408.260.2 |
| Door Handle profile | | 5300 mm | DK0.408.530.0 | DK0.408.530.1 | DK0.408.530.2 |
| Sealing strip | | number of metres x | AM0.959.001 | AM0.959.001 | AM0.959.001 |
| Adhesive conductive strip | | 1 m | DK0.419.001 | DK0.419.001 | DK0.419.001 |
| D. 11. Cl. 6. 44 | 2000 mm | 2000 mm | DK0.478.200.0 | DK0.478.200.1 | DK0.478.200.2 |
| Bottom profile for 16 mm | 3000 mm | 3000 mm | DK0.478.300.0 | DK0.478.300.1 | DK0.478.300.2 |
| panels | 6000 mm | 6000 mm | DK0.478.600.0 | DK0.478.600.1 | DK0.478.600.2 |
| | 2000 mm | 2000 mm | DK0.428.200.0 | DK0.428.200.1 | DK0.428.200.2 |
| Bottom profile for 19 mm panels | 3000 mm | 3000 mm | DK0.428.300.0 | DK0.428.300.1 | DK0.428.300.2 |
| paneis | 6000 mm | 6000 mm | DK0.428.600.0 | DK0.428.600.1 | DK0.428.600.2 |
| | 2000 mm | 2000 mm | DK0.128.200.0 | DK0.128.200.1 | DK0.128.200.2 |
| Bottom running track | 3000 mm | 3000 mm | DK0.128.300.0 | DK0.128.300.1 | DK0.128.300.2 |
| | 6000 mm | 6000 mm | Dk0.128.600.0 | Dk0.128.600.1 | Dk0.128.600.2 |
| | 2000 mm | 2000 mm | DK0.908.200.0 | DK0.908.200.1 | DK0.908.200.2 |
| Running track cover | 3000 mm | 3000 mm | DK0.908.300.0 | DK0.908.300.1 | DK0.908.300.2 |
| | 6000 mm | 6000 mm | DK0.908.600.0 | DK0.908.600.1 | DK0.908.600.2 |

Accessories selection

| Fitting set for 1 door | Reference |
|--|-----------|
| Wheels | DK0.001 |
| Upper roller guides and stoppers (side stoppers and pass-through stoppers) | DK0.101 |
| Fitting set for 2 doors | |
| Wheels | DK0.002 |
| Upper roller guides and stoppers (side stoppers and pass-through stoppers) | DK0.102 |
| Fitting set for 3 doors | |
| Wheels | DK0.003 |
| Upper roller guides and stoppers (side stoppers and pass-through stoppers) | DK0.103 |
| | |

The top profile is suitable for 19 mm panels; with adapters, it can also be used for 16 mm door panels. These adapters are always incorporated in the wheel fittings.





argenta symfo 60

Complete sets


| | Bottom running & top guiding track | Grey anodised | White | Black |
|--|---------------------------------------|---------------|-----------|-----------|
| 2 doors - Max. door width = 1000 mm - Max. door height = 2600 mm | 2000 mm | DK0.152.0 | DK0.152.1 | DK0.152.2 |
| 2 doors - Max. door width = 1500 mm - Max. door height = 2600 mm | 3000 mm | DK0.172.0 | DK0.172.1 | DK0.172.2 |
| 3 doors - Max. door width = 1000 mm - Max. door height = 2600 mm | 3000 mm | DK0.173.0 | DK0.173.1 | DK0.173.2 |

A set includes all required parts for doors with an opening width of 2 or 3 metres, with panels that are up to 1 or 1.5 metres wide and up to 2600 mm tall. Aside from the fittings (type DK0.00X) and the top and bottom rails (with cover profiles), the frame profiles to affix the panels (16 mm/19 mm) are also supplied (with the bottom profile DK0.478. xxx), as are self-adhesive guiding strips. The stoppers and upper roller guides are not included in this set and must be ordered separately, e.g.: DK0.902 (upper roller guide for two doors) or DK0.903 (upper roller guide for three doors).



FURNITURE HARDWARE FOR GLASS PANELS

can weigh up to 30 kg each, and an endless number of panels can be fitted next to each other.

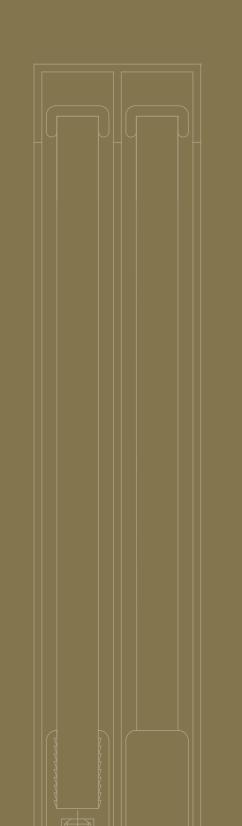





argenta **SLIDING GLASS**

In this range, argenta® supplies excellent fitting sets for sliding glass windows. Such windows are suitable for many different purposes, such as display cabinets or counters. The range of sliding door hardware for glass windows that are supported from below is adjustable up to a maximum weight of 30 kg, with a maximum glass thickness of 8 mm.



Technical drawing





Tracks & profiles


| | Max. door width | Length | Reference |
|--------------------|-----------------|---------|-----------|
| | | 750 mm | 520.128.0 |
| | | 1000 mm | 520.138.0 |
| Double U-top guide | As per setup | 1500 mm | 520.148.0 |
| track | As per setup | 2000 mm | 520.158.0 |
| | | 3000 mm | 520.178.0 |
| | | 6000 mm | 520.198.0 |
| | | 750 mm | 520.228.0 |
| | | 1000 mm | 520.238.0 |
| Bottom running | A | 1500 mm | 520.248.0 |
| track | As per setup | 2000 mm | 520.258.0 |
| | | 3000 mm | 520.278.0 |
| | | 6000 mm | 520.298.0 |
| | 750 mm | 750 mm | 520.428.0 |
| | 1000 mm | 1000 mm | 520.438.0 |
| 0 | 1500 mm | 1500 mm | 520.448.0 |
| 8 mm glass profile | 2000 mm | 2000 mm | 520.458.0 |
| | 3000 mm | 3000 mm | 520.478.0 |
| | 6000 mm | 6000 mm | 520.498.0 |
| | 750 mm | 750 mm | 520.528.0 |
| | 1000 mm | 1000 mm | 520.538.0 |
| C | 1500 mm | 1500 mm | 520.548.0 |
| 6 mm glass profile | 2000 mm | 2000 mm | 520.558.0 |
| | 3000 mm | 3000 mm | 520.578.0 |
| | 6000 mm | 6000 mm | 520.598.0 |

Accessories selection

| Fitting | Reference |
|---------|-----------|
| 8 mm | 520.600.0 |
| 6 mm | 520.700.0 |

Every fitting set comes with all the rollers, suspension, guiding systems and stoppers you need. One fitting set is required per door panel.


possible configurations




Choice of locks

| Fitting | Direction | Reference |
|---------|---------------|--------------------|
| 8 mm | Left Right | 529.910 529.920 |
| 6 mm | Left Right | 529.950 529.960 |

Technical drawing

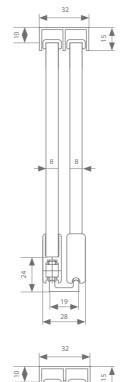



Tracks & profiles

| | Max. door width | Length | Reference |
|--------------------|-----------------|---------|-----------|
| | | 750 mm | 520.128.0 |
| | | 1000 mm | 520.138.0 |
| Double U-top guide | | 1500 mm | 520.148.0 |
| track | As per setup | 2000 mm | 520.158.0 |
| | | 3000 mm | 520.178.0 |
| | | 6000 mm | 520.198.0 |
| | | 750 mm | 520.328.0 |
| | | 1000 mm | 520.338.0 |
| Double bottom | A | 1500 mm | 520.348.0 |
| running track | As per setup | 2000 mm | 520.358.0 |
| | | 3000 mm | 520.378.0 |
| | | 6000 mm | 520.398.0 |
| | 750 mm | 750 mm | 520.428.0 |
| | 1000 mm | 1000 mm | 520.438.0 |
| 0 | 1500 mm | 1500 mm | 520.448.0 |
| 8 mm glass profile | 2000 mm | 2000 mm | 520.458.0 |
| | 3000 mm | 3000 mm | 520.478.0 |
| | 6000 mm | 6000 mm | 520.498.0 |
| | 750 mm | 750 mm | 520.528.0 |
| | 1000 mm | 1000 mm | 520.538.0 |
| c 1 C | 1500 mm | 1500 mm | 520.548.0 |
| 6 mm glass profile | 2000 mm | 2000 mm | 520.558.0 |
| | 3000 mm | 3000 mm | 520.578.0 |
| | 6000 mm | 6000 mm | 520.598.0 |

Accessories selection

| Fitting | Reference |
|---------|-----------|
| 8 mm | 520.600.0 |
| 6 mm | 520.700.0 |

Every fitting set comes with all the rollers, suspension, guiding systems and stoppers you need. One fitting set is required per door panel.

possible configurations



Choice of locks

| Fitting | Direction | Reference |
|---------|---------------|--------------------|
| 8 mm | Left Right | 529.910 529.920 |
| 6 mm | Left Right | 529.950 529.960 |

NOTES









